

A 投射燈系列


37

投射燈

38



ATS-380-1
ATS-380-2



ATS-380-5
ATS-380-6



ATS-380-7



ATS-380-8
ATS-380-9

39



ATS-390-1



ATS-390-3
ATS-390-4



ATS-390-5
ATS-390-6



ATS-390-7



ATS-390-8

40



ATS-400-1
ATS-400-4



ATS-400-3



ATS-400-5
ATS-400-6



ATS-400-7
ATS-400-8

41



ATS-410-1



ATS-410-2



ATS-410-3



ATS-410-5



ATS-410-7



ATS-410-8

42



ATS-420-1



ATS-420-3



ATS-420-5

櫥櫃燈



ATS-420-7



ATS-420-8



ATS-420-9

43



ATS-430-1
ATS-430-2
ATS-430-3



ATS-430-5
ATS-430-6
ATS-430-7



ATS-430-9
ATS-430-10



ATS-430-13



ATS-430-15

44



ATS-440-1



ATS-440-3



ATS-440-5
ATS-440-6



ATS-440-7
ATS-440-8

ATS-380

38

投射燈

材質 全鋁合金本體，質體美觀，散熱片散熱性佳


特點 全方位水平垂直角度，調節軌道投射方便，多樣角度照度可選擇

適用 專賣店、商業空間……等場所




○ 白W


● 黑B




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-380-1	COB 50W	4500	3000 4000	15°
ATS-380-2	COB 30W	2000		25° 36° 50°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-380-5	COB 50W	4500	3000 4000	15°
ATS-380-6	COB 30W	2000		25° 36° 50°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-380-7	COB 30W	2300	3000 4000	12° 60°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-380-8	COB 35W	3000	3000 4000	12°
ATS-380-9	COB 20W	2200		24° 36°



ATS-390

材質 全鋁合金本體，質體美觀，散熱片散熱性佳

特點 全方位水平垂直角度，調節軌道投射方便，多樣角度照度可選擇


適用 商業空間、購物中心……等百貨場所




○ 白W ● 黑B

39


投射燈




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-390-1	COB 33W	3000	3000 4000	15° 24° 38°




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-390-3	COB 20W	1800	3000 4000	20°
ATS-390-4	COB 30W	2500		



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-390-5	COB 40W	3000	3000 4000	15° 24°
ATS-390-6	COB 30W	2600		36° 50°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-390-7	COB 20W	2000	3000 6000	25°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-390-8	COB 30W	2500	3000 4000	12° 24° 36°

ATS-400

40

投射燈

材質 鋁合金，粉體烤漆


特點 多支架的造型，簡潔大方

適用 博物館、購物中心，各展覽場所




○ 白W


● 黑B




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-400-1	COB 30W	2500	3000 4000	15°
ATS-400-4	COB 40W	3600		24° 38°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-400-3	COB 18W	1700	3000	24°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-400-5	COB 20W	1600	3000	15° 25°
ATS-400-6	COB 30W	2500		38°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-400-7	COB 20W	1600	3000	15° 25°
ATS-400-8	COB 30W	2500		38°


ATS-410

材質 鋁合金本體，粉體烤漆
適用 住家、辦公室等照明




41


投射燈




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-410-1	COB 18W	1300	3000 4000	45°




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-410-2	COB 25W	2100	6000	30°




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-410-3	COB 10W	800	3000 4000 6000	40°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-410-5	COB 15W	1200	3000 4000 6000	30°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-410-7	COB 12W	900	3000	25°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-410-8	COB 12W	900	3000	15° 24°

ATS-420

42


投射燈／櫥櫃燈

材質 鋁合金 **特點** 單背式支架造型，簡潔大方，更換燈泡容易
適用 美術館、辦公梯廳、VIP室……等




○ 白W


● 黑B



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-420-1	LED GU10 8W	680	2800	25°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-420-3	LED PAR20 10W	800	2800	15° 24° 38°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-420-5	LED PAR30 15W	1200	2800	15° 24° 38°




櫥櫃燈



材質 鋁擠型＋鋁燈罩

特點 造型簡單，無紫外線，可接受訂製

適用 珠寶、鑽石櫃、裝飾品櫃

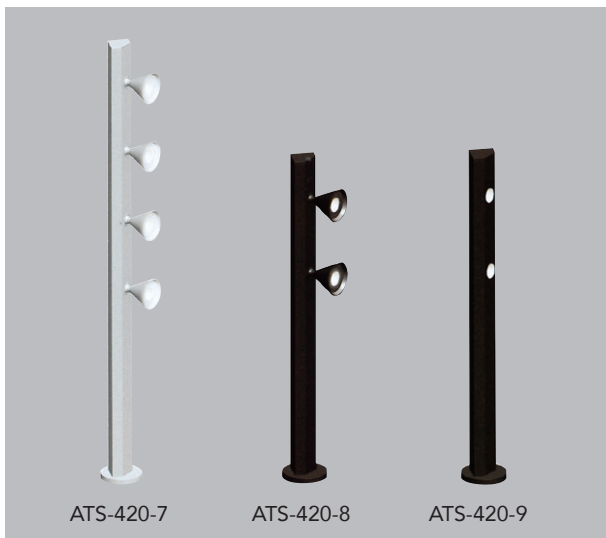

型號	光源	流明 (LM)	色溫 (K)
ATS-420-7	LED 4.8W	320	3000
ATS-420-8	LED 2.4W	160	4000
ATS-420-9	LED 2.4W	160	4000




ATS-430

材質 鋁合金+鋼板沖壓 適用 一般場所均可使用




43

投射燈




型號	光源	流明 (LM)	色溫 (K)	角度	備註
ATS-430-1	COB AR111 14W	1050	2700 5500	25°	
ATS-430-2	COB AR111 24W	1800			
ATS-430-3	COB AR111 20W	1600	2700 4000	20°	飛利浦 可調光型




型號	光源	流明 (LM)	色溫 (K)	角度	備註
ATS-430-5	COB AR111 14W	1050	2700 5500	25°	
ATS-430-6	COB AR111 24W	1800			
ATS-430-7	COB AR111 20W	1600	2700 4000	20°	飛利浦 可調光型


材質 鋁合金 特點 供應器內置式 適用 辦公室、公共區



型號	光源	流明 (LM)	色溫 (K)	角度	備註
ATS-430-9	COB 20W	1700	3000 4000	60°	供應器 內置
ATS-430-10	COB 30W	2200			



型號	光源	流明 (LM)	色溫 (K)	角度	備註
ATS-430-13	COB 30W	2600	3000	12° 24° 36° 50°	供應器 內置



型號	光源	流明 (LM)	色溫 (K)	角度	備註
ATS-430-15	COB 40W	4000	3000 4000	12° 24° 30° 50°	供應器 內置

ATS-440

44

投射燈

材質 鋁合金，粉體烤漆


特點 產品陣容中，因中心發光強度較高，而新增了最適合局部照明的夾角和聚光型產品

適用 百貨服飾、餐廳、VIP室、汽車展示場




○ 白W


● 黑B




型號	光源	流明 (LM)	色溫 (K)	角度
ATS-440-1	COB 30W	2600	3000 4000	15° 24° 38°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-440-3	COB 18W	1700	3000 4000	15° 24° 38°



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-440-5	COB 25W	2200	3000 4000	15° 24° 38°
ATS-440-6	COB 33W	3000		



型號	光源	流明 (LM)	色溫 (K)	角度
ATS-440-7	COB 10W	760	3000 4000	15° 24° 38°
ATS-440-8	COB 15W	1200		